
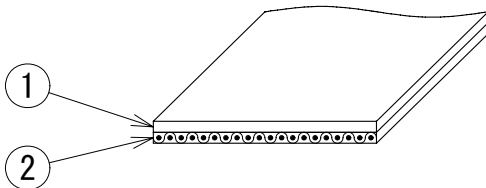


Technical Data Sheet		NLG™		
U-001		Belt type	WU-6A	
Applications		<ul style="list-style-type: none"> • Food Conveyor • Conveyor for lightweight material 		
Item		Description		Remarks
Specification	Construction			① Polyurethane (Mat surface, White) ② PES Fabric (White)
	Dimensions	Antistatic	Yes	
	Width	10 to 1,500 [mm]		
	Length	700 to 100,000 [mm]		
	Thickness	0.7 [mm]		
	Joint	Finger Joint or Skiver Joint		
Properties	Tensile strength	60 [N/mm]		Test speed : 50 mm/min
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.3 [%]		
	Tension at 0.3 [%]	0.6 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	ϕ 15 or 2R knife edge [mm] (Finger Joint) ϕ 20 [mm] (Skiver Joint)		
	Operating temp.	-20 to 80 [°C]		
	Coefficient of friction	0.4 to 0.5(Steel) Polyurethane side 0.2 to 0.25(Steel) Fabric side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	0.7 [kg/m ²]		
Features				