
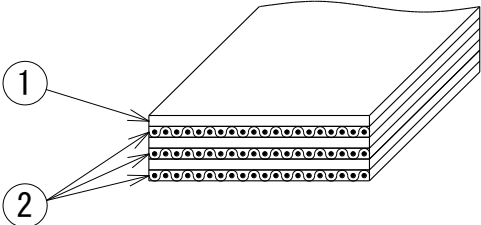


Technical Data Sheet		NLG™		
		Belt type	WU-18A	
U-007		<ul style="list-style-type: none"> <li>• Food Conveyor</li> <li>• Conveyor for heavyweight material</li> <li>• Steel industry</li> </ul>		
Applications				
Item		Description		Remarks
Specification	Construction			①Polyurethane (Mat surface, White) ②PES Fabric
Dimensions	Antistatic	Yes		
	Width	10 to 1,500 [mm]		
	Length	700 to 100,000 [mm]		
	Thickness	1.9 [mm]		
	Joint	Finger Joint or Skiver Joint		
Properties	Tensile strength	180 [N/mm]		Test speed : 50 mm/min
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 [%]		
	Tension at 0.5 [%]	3 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	$\phi$ 40 [mm] (Finger Joint) $\phi$ 80 [mm] (Skiver Joint)		
	Operating temp.	-20 to 80 [°C]		
	Coefficient of friction	0.4 to 0.5(Steel) Polyurethane side 0.2 to 0.25(Steel) Fabric side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.9 [kg/m <sup>2</sup> ]		
Features				