
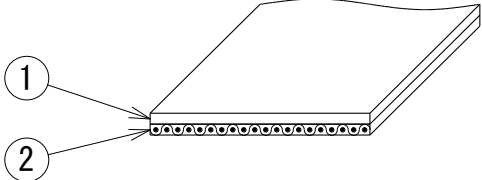


Technical Data Sheet		NLG™			
		Belt type	GUH-6A		
U-027		Applications			<ul style="list-style-type: none"> • Accumulation conveyor • Conveyor for lightweight material
Item		Description		Remarks	
Specification	Construction			①High-hardness polyurethane (Mat surface, Green) ②PES Fabric (White)	
	Dimensions	Antistatic	Yes		
	Width	10 to 1,500 [mm]			
	Length	700 to 100,000 [mm]			
	Thickness	0.7 [mm]			
	Joint	Finger Joint or Skiver Joint			
Properties	Tensile strength	60 [N/mm]		Test speed : 50 mm/min	
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.	
	Standard elongation	0.3 [%]			
	Tension at 0.3 [%]	0.6 [N/mm]		Ambient condition: 23°C,50%R.H.	
	Minimum pulley dia.	φ20 [mm] (Finger Joint) φ30 [mm] (Skiver Joint)			
	Operating temp.	-20 to 80 [°C]			
	Coefficient of friction	0.3 to 0.4(Steel) Polyurethane side 0.2 to 0.25(Steel) Fabric side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.	
	Mass	0.7 [kg/m ²]			
Features	<ul style="list-style-type: none"> • Slippery surface. • Abrasion resistance. 				