
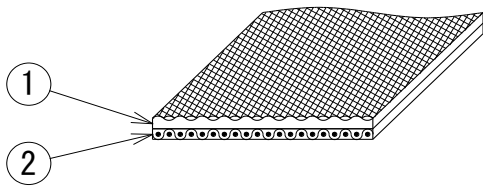


Technical Data Sheet		NLG™		
		Belt type	GUM-7ANL	
U-081		<ul style="list-style-type: none"> • Knife edge conveyor • Conveyor for lightweight material 		
Applications				
Item		Description		Remarks
Specification	Construction			①Polyurethane (Fine textured surface, Green) ②Low-noised PES Fabric (White)
Dimensions	Antistatic	Yes		
	Width	10 to 1,500 [mm]		
	Length	700 to 100,000 [mm]		
	Thickness	1.15 [mm]		
	Joint	Finger Joint or Skiver Joint		
Properties	Tensile strength	70 [N/mm]		Test speed : 50 mm/min
	Elongation at break	30 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.3 [%]		
	Tension at 0.3 [%]	0.6 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	ϕ 15 or 2R knife edge [mm] (Finger Joint) ϕ 20 [mm] (Skiver Joint)		
	Operating temp.	-20 to 80 [°C]		
	Coefficient of friction	0.4 to 0.5(Steel) Polyurethane side 0.2 to 0.25(Steel) Fabric side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	0.9 [kg/m ²]		
Features	<ul style="list-style-type: none"> • Low-noise. 			