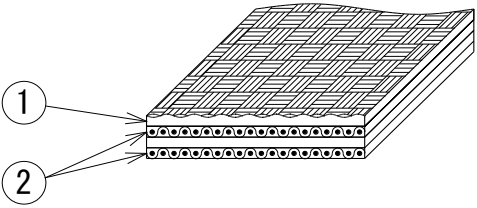


Technical Data Sheet UG-003		NLG™		NITTA
		Belt type	WEUK-12A-G	
Applications		<ul style="list-style-type: none"> • Bakery • Food conveyor • Conveyor for middleweight material 		
Item		Description		Remarks
Specification	Construction			① Polyurethane (K pattern, White) ② PES Fabric (White)
	Dimensions	Antistatic	Yes	
	Width	10 to 1,400 [mm]		
	Length	700 to 100,000 [mm]		
	Thickness	1.3 [mm]		
	Joint	Finger Joint or Skiver Joint		
Properties	Tensile strength	120 [N/mm]		Test speed : 50 mm/min
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 [%]		
	Tension at 0.5 [%]	1.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	ϕ 15 [mm] (Finger Joint) ϕ 40 [mm] (Skiver Joint)		
	Operating temp.	-20 to 80 [°C]		
	Coefficient of friction	0.5 to 0.6(Steel) Polyurethane side 0.2 to 0.3(Steel) Fabric side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.2 [kg/m ²]		
Features	<ul style="list-style-type: none"> • Releasable. 			