
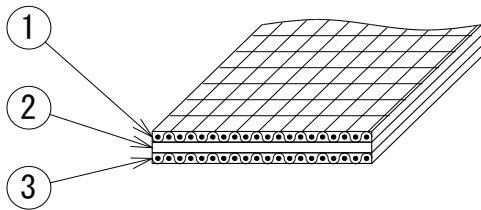


Technical Data Sheet		NLG™		
		UG-008	Belt type	
Applications		<ul style="list-style-type: none"> <li>• Accumulation conveyor</li> <li>• Conveyor for middleweight material</li> </ul>		
Item		Description		Remarks
Specification	Construction			①PES Fabric (Green) ②Polyurethane ③①PES Fabric (White)
	Dimensions	Antistatic	Yes	
	Width	10 to 2,000 [mm]		
	Length	700 to 100,000 [mm]		
	Thickness	1.4 [mm]		
	Joint	Finger Joint or Skiver Joint		
Properties	Tensile strength	160 [N/mm]		Test speed : 50 mm/min
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 [%]		
	Tension at 0.5 [%]	3 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	φ50 [mm] (Finger Joint) φ60 [mm] (Skiver Joint)		
	Operating temp.	-20 to 80 [°C]		
	Coefficient of friction	0.3 to 0.35(Steel) Green side 0.2 to 0.3(Steel) White side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.2 [kg/m <sup>2</sup> ]		
Features				