
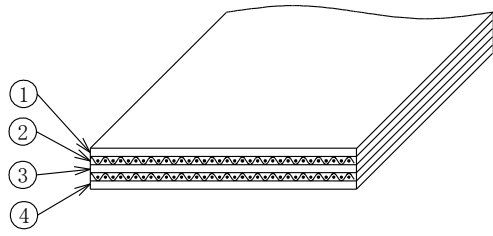


| Technical Data Sheet | | NITTA BELT POLY | |  |
|----------------------|-------------------------|--|----------|--|
| | | Belt type | HA-1000G | |
| P-240 | | Applications | | |
| Item | Description | | Remarks | |
| Specification | Construction |  | | ①NBR (Ground surface, Blue) ②PA Fabric ③PA Film ④PA Fabric (Ground surface, Blue) |
| | Antistatic | Yes | | |
| Dimensions | Width | 10 to 325 [mm] | | |
| | Length | 1,000 to 105,000 [mm] | | |
| | Thickness | 3.5 [mm] | | |
| | Joint | Skived joint Adhesive Polybond A, E | | |
| | Tensile strength | 300 [N/mm] | | Test speed: 50mm/min |
| Properties | Elongation at break | 20 [%] | | Ambient condition: 23°C,50%R.H. |
| | Standard elongation | 3 [%] | | |
| | Tension at 3 [%] | 22.5 [N/mm] | | Ambient condition: 23°C,50%R.H. |
| | Minimum pulley dia. | 100 [mm] | | |
| | Operating temp. | -20 to +80°C | | |
| | Coefficient of friction | 0.5 to 0.6(Steel) (Both side) | | Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H. |
| | Mass | 4 [kg/m ²] | | |
| Features | | | | |
| | | | | |

Industrial Products Div.