
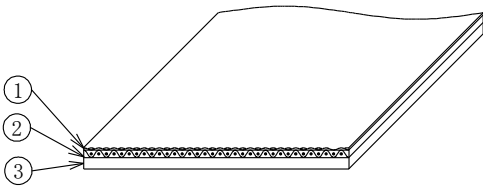


Technical Data Sheet P-006		NITTA BELT POLY		
		Belt type	SG-750-2P	
Applications				
Item	Description	Remarks		
Specification	Construction			①NBR coating (Green) ②PA Fabric ③PA Film
	Antistatic	No		
Dimensions	Width	6 to 325 [mm]		
	Length	500 to 105,000 [mm]		
	Thickness	1.1 [mm]		
	Joint	Skived joint Adhesive Polybond A		
	Tensile strength	225 [N/mm]		Test speed: 50mm/min
Properties	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 [%]		
	Tension at 1 [%]	5.6 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	50 [mm]		
	Operating temp.	-20 to +80°C		
	Coefficient of friction	0.3 to 0.4(Steel) (NBR side) 0.1 to 0.2(Steel) (PA side)		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.2 [kg/m ²]		
Features				

Industrial Products Div.