
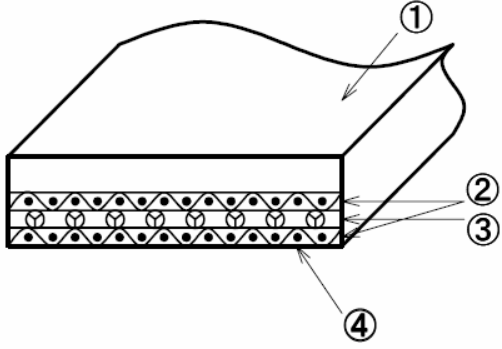


Technical Data Sheet		Belt type	SE-A-NR	Nitta Corporation of America 24-Feb-09	
Main uses	Feeder belts Sack machines				
No.	Item	Description		Remarks	
1	Specification	Construction		<ul style="list-style-type: none"> 1) blue natural rubber 50A (Ground surface) 2) Polyamide fabric 3) Polyester cord 4) black chloroprene rubber (glossy surface) 	
2	Dimensions	Antistatic	Yes		
		Width	7 to 400 mm		
		Length	400 to 1970 mm		By molds
		Thickness	8 mm		Thickness available 2 to 14
		Joint	Seamless		
3	Properties	Tensile strength	58.8 N/mm width		Test speed: 10%/min Ambient condition: 23°C@50%
		Elongation at break	10 %		
		Standard elongation	0.5 %		
		Shaft load	7.35N/mm width		At 0.5% elongation 23°C @ 50%
		Minimum Pulley Dia.	80 mm		
		Temperature range	-20 to +60 °C		
		Coefficient of friction	Ground surface approx. 1.5 Impregnated surface 0.2 to 0.4		Ambient condition 23°C @ 50% Against stainless steel or aluminum
		Mass	10.2 kg/m ²		
4	Features	High friction Soft surface			