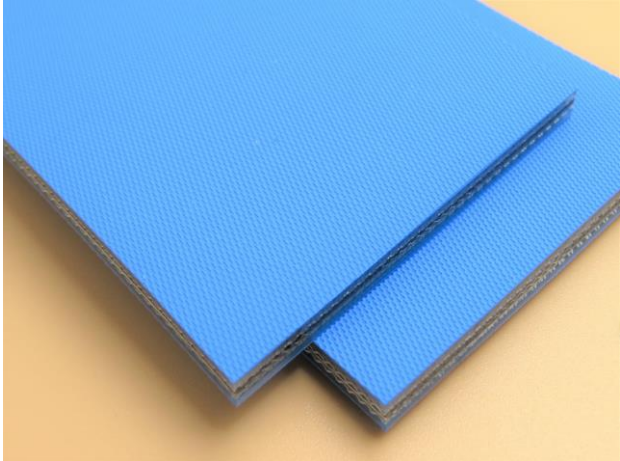



Technical Datasheet		PolySprint™ Belt type	Power Transmission and Conveyor Belt								
		XH-8E30	PS-019 ver.0								
<b>Applications</b>											
<ul style="list-style-type: none"> <li>▪ Folder gluer</li> <li>▪ Woodworking machine</li> <li>▪ Medium duty conveyor</li> </ul>											
<b>Construction</b>											
		<table border="0"> <tr> <td>Top side</td> <td>Bottom side</td> </tr> <tr> <td>NBR</td> <td>NBR</td> </tr> <tr> <td>Textured surface</td> <td>Textured surface</td> </tr> <tr> <td>Blue</td> <td>Blue</td> </tr> </table>	Top side	Bottom side	NBR	NBR	Textured surface	Textured surface	Blue	Blue	
		Top side	Bottom side								
NBR	NBR										
Textured surface	Textured surface										
Blue	Blue										
		<table border="0"> <tr> <td>Tension member</td> <td>Splice</td> </tr> <tr> <td>Polyester</td> <td>Finger</td> </tr> <tr> <td>Fabric</td> <td>(10×70)</td> </tr> </table>	Tension member	Splice	Polyester	Finger	Fabric	(10×70)			
Tension member	Splice										
Polyester	Finger										
Fabric	(10×70)										
		Construction 									
<b>Dimensions</b>											
Width/Roll (max.)	500mm										
Width/Endless (max.)	500mm										
Length (max.)	100m										
Total thickness	3.0mm										
Weight	3.5 Kg/m <sup>2</sup>										
©Please contact Nitta if you need other dimensions.											
<b>Regulatory compliance</b>											
RoHS(2011/65/EC)											
REACH regulation											
<b>Features</b>											
Antistatic											
High lateral rigidity											
Twist resistance											
Roller bed											
Easy splice with NITTA tool											
<b>Properties</b>											
<b>Minimum pulley diameter</b>		<b>Tensile properties</b>									
Flexing	Finger	40mm	Tensile strength								
			150N/mm								
Back flexing	Finger	40mm	Elongation at break								
			13%								
			Maximum allowable tension								
			18N/mm								
			Maximum allowable elongation								
			2.0%								
<b>Dynamic properties</b>		<b>Coefficient of friction</b>									
Standard elongation	1.0%										
Tension after relaxation at 1.0% *	8N/mm										
Initial tension at 2.0%	18N/mm										
Tension after relaxation at 2.0% *	12N/mm										
Operating temperature range	-20~60°C										
			Top vs. Steel								
			0.7~0.8								
			vs. Paper								
			0.8~0.9								
			Bottom vs. Steel								
			0.7~0.8								
			vs. Paper								
			0.8~0.9								
			vs. Lagged pulley								
			0.9~1.0								
			vs. POM (resin)								
			0.7~0.9								
	*After 200hrs running-in										
<b>NITTA CORPORATION</b>											