
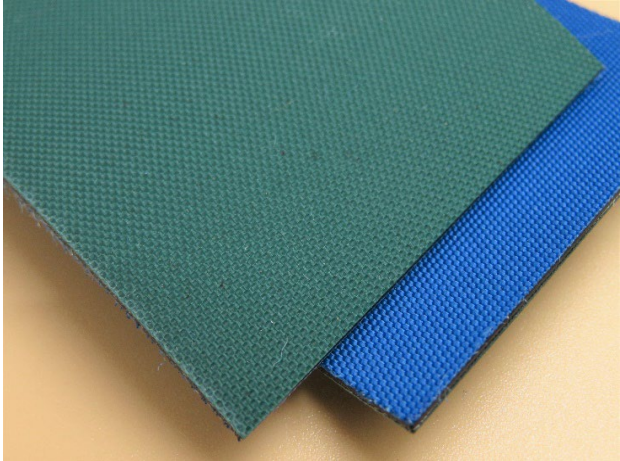


Technical Datasheet	PolyBelt™ Belt type	Power Transmission and Conveyor Belt TAIR-350	PN-020 Ver.0
----------------------------	-------------------------------	--	--------------

- Applications**
- Paper converting belt for printing application
 - Book making machine
 - Table supporting conveyor

Construction



<table border="0"> <tr><td>Top side</td><td>Bottom side</td></tr> <tr><td>NBR</td><td>Polyamide</td></tr> <tr><td>0.2mm</td><td>-</td></tr> <tr><td>Rough pattern</td><td>Fabric</td></tr> <tr><td>Green</td><td>Blue</td></tr> </table> <table border="0"> <tr><td>Tension member</td><td>Splice</td></tr> <tr><td>Polyamide</td><td>Skiver</td></tr> <tr><td>Film</td><td></td></tr> <tr><td>0.35mm</td><td></td></tr> </table>	Top side	Bottom side	NBR	Polyamide	0.2mm	-	Rough pattern	Fabric	Green	Blue	Tension member	Splice	Polyamide	Skiver	Film		0.35mm		<p>Construction </p>
Top side	Bottom side																		
NBR	Polyamide																		
0.2mm	-																		
Rough pattern	Fabric																		
Green	Blue																		
Tension member	Splice																		
Polyamide	Skiver																		
Film																			
0.35mm																			

<p>Dimensions</p> <table border="0" style="width: 100%;"> <tr><td>Width/Roll (max.)</td><td style="text-align: right;">320mm</td></tr> <tr><td>Width/Endless (max.)</td><td style="text-align: right;">320mm</td></tr> <tr><td>Length (max.)</td><td style="text-align: right;">100m</td></tr> <tr><td>Total thickness</td><td style="text-align: right;">1.15mm</td></tr> <tr><td>Weight</td><td style="text-align: right;">1.2 Kg/m²</td></tr> </table> <p>Please contact Nitta if you need other dimensions.</p> <p>Regulatory compliance</p> <p>RoHS(2011/65/EC, (EU)2015/863)</p> <p>Features</p> <p>Antistatic Slider bed</p>	Width/Roll (max.)	320mm	Width/Endless (max.)	320mm	Length (max.)	100m	Total thickness	1.15mm	Weight	1.2 Kg/m ²	<p>Properties</p> <table border="0" style="width: 100%;"> <tr><td colspan="2">Minimum pulley diameter</td></tr> <tr><td>Power Transmission Application</td><td style="text-align: right;">30mm</td></tr> <tr><td>Skiver</td><td style="text-align: right;">30mm</td></tr> <tr><td colspan="2"> </td></tr> <tr><td>Conveyor Application</td><td style="text-align: right;">30mm</td></tr> <tr><td>Skiver</td><td style="text-align: right;">30mm</td></tr> <tr><td colspan="2"> </td></tr> <tr><td colspan="2">Dynamic properties</td></tr> <tr><td>Standard elongation</td><td style="text-align: right;">1.0%</td></tr> <tr><td>Tension after relaxation at 1.0%</td><td style="text-align: right;">2.6N/mm</td></tr> <tr><td>Initial tension at 3.0%</td><td style="text-align: right;">15.6N/mm</td></tr> <tr><td>Tension after relaxation at 3.0%</td><td style="text-align: right;">7.8N/mm</td></tr> <tr><td>Operating temperature range</td><td style="text-align: right;">-20~80°C</td></tr> <tr><td>Operating temperature range*</td><td style="text-align: right;">-20~80°C</td></tr> <tr><td colspan="2" style="text-align: center;">*When under continuous use</td></tr> </table>	Minimum pulley diameter		Power Transmission Application	30mm	Skiver	30mm			Conveyor Application	30mm	Skiver	30mm			Dynamic properties		Standard elongation	1.0%	Tension after relaxation at 1.0%	2.6N/mm	Initial tension at 3.0%	15.6N/mm	Tension after relaxation at 3.0%	7.8N/mm	Operating temperature range	-20~80°C	Operating temperature range*	-20~80°C	*When under continuous use		<table border="0" style="width: 100%;"> <tr><td colspan="2">Tensile properties</td></tr> <tr><td>Tensile strength</td><td style="text-align: right;">105N/mm</td></tr> <tr><td>Elongation at break</td><td style="text-align: right;">20%</td></tr> <tr><td>Maximum allowable tension</td><td style="text-align: right;">15.6N/mm</td></tr> <tr><td>Maximum allowable elongation</td><td style="text-align: right;">3.0%</td></tr> <tr><td colspan="2"> </td></tr> <tr><td colspan="2">Coefficient of friction</td></tr> <tr><td>Top</td><td>vs. Steel</td></tr> <tr><td></td><td style="text-align: right;">0.5~0.6</td></tr> <tr><td></td><td>vs. Paper</td></tr> <tr><td></td><td style="text-align: right;">0.6~0.7</td></tr> <tr><td>Bottom</td><td>vs. Steel</td></tr> <tr><td></td><td style="text-align: right;">0.2~0.3</td></tr> <tr><td></td><td>vs. Paper</td></tr> <tr><td></td><td style="text-align: right;">0.3~0.4</td></tr> <tr><td></td><td>vs. Lagged pulley</td></tr> <tr><td></td><td style="text-align: right;">0.4~0.6</td></tr> <tr><td></td><td>vs. POM (resin)</td></tr> <tr><td></td><td style="text-align: right;">0.2~0.4</td></tr> </table>	Tensile properties		Tensile strength	105N/mm	Elongation at break	20%	Maximum allowable tension	15.6N/mm	Maximum allowable elongation	3.0%			Coefficient of friction		Top	vs. Steel		0.5~0.6		vs. Paper		0.6~0.7	Bottom	vs. Steel		0.2~0.3		vs. Paper		0.3~0.4		vs. Lagged pulley		0.4~0.6		vs. POM (resin)		0.2~0.4
Width/Roll (max.)	320mm																																																																															
Width/Endless (max.)	320mm																																																																															
Length (max.)	100m																																																																															
Total thickness	1.15mm																																																																															
Weight	1.2 Kg/m ²																																																																															
Minimum pulley diameter																																																																																
Power Transmission Application	30mm																																																																															
Skiver	30mm																																																																															
Conveyor Application	30mm																																																																															
Skiver	30mm																																																																															
Dynamic properties																																																																																
Standard elongation	1.0%																																																																															
Tension after relaxation at 1.0%	2.6N/mm																																																																															
Initial tension at 3.0%	15.6N/mm																																																																															
Tension after relaxation at 3.0%	7.8N/mm																																																																															
Operating temperature range	-20~80°C																																																																															
Operating temperature range*	-20~80°C																																																																															
*When under continuous use																																																																																
Tensile properties																																																																																
Tensile strength	105N/mm																																																																															
Elongation at break	20%																																																																															
Maximum allowable tension	15.6N/mm																																																																															
Maximum allowable elongation	3.0%																																																																															
Coefficient of friction																																																																																
Top	vs. Steel																																																																															
	0.5~0.6																																																																															
	vs. Paper																																																																															
	0.6~0.7																																																																															
Bottom	vs. Steel																																																																															
	0.2~0.3																																																																															
	vs. Paper																																																																															
	0.3~0.4																																																																															
	vs. Lagged pulley																																																																															
	0.4~0.6																																																																															
	vs. POM (resin)																																																																															
	0.2~0.4																																																																															