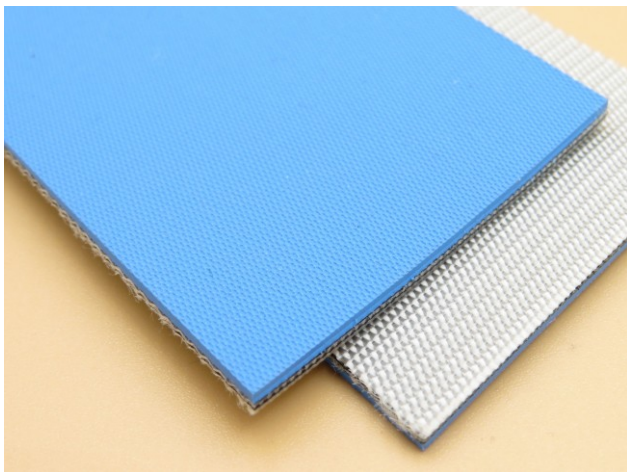



Technical Datasheet		Conveyor Belt	
Belt type		GH-20Z	
		G-002 Ver.7	
Applications ▪ Steel plate conveyance ▪ Hygiene / Diaper, napkin ▪ Material handling ▪ Heavy duty conveyor			
Construction			
	Top side		Bottom side
	NBR		Polyester
	1.0mm		-
	Rough pattern		Fabric
	Blue		White
	Tension member		Splice
	Polyester		Skiver
	Fabric		
	2ply		
	Construction		
Dimensions			
Width/Roll (max.)		960mm	
Width/Endless (max.)		960mm	
Length (max.)		100m	
Total thickness		2.1mm	
Weight		2.4 kg/m ²	
Please contact Nitta if you need other dimensions.			
Regulatory compliance			
RoHS(2011/65/EC, (EU)2015/863)			
Features			
Antistatic			
Slider bed			
Roller bed			
Properties			
Minimum pulley diameter			
Flexing			
Skiver		40mm	
		-	
Back flexing			
Skiver		40mm	
		-	
Knife edge		-	
Dynamic properties			
Standard elongation		0.5%	
Tension after relaxation at 0.5%		3.0N/mm	
Initial tension at 1.0%		12.0N/mm	
Tension after relaxation at 1.0%		6.0N/mm	
Operating temperature range		-20~80°C	
Operating temperature range*		-20~60°C	
*When under continuous use			
Tensile properties			
Tensile strength		170N/mm	
Elongation at break		20%	
Maximum allowable tension		12.0N/mm	
Maximum allowable elongation		1.0%	
Coefficient of friction			
Top	vs. Steel	0.6~0.7	
	vs. Paper	0.7~0.8	
Bottom	vs. Steel	0.1~0.3	
	vs. Lagged pulley	0.3~0.6	
	vs. POM (resin)	0.1~0.4	
NITTA CORPORATION			