
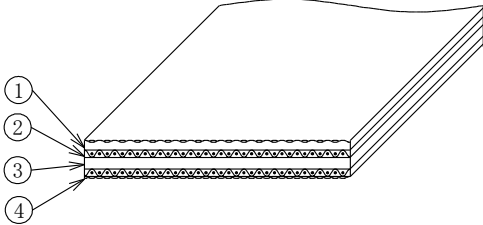


Technical Data Sheet		NITTA BELT POLY		
		Belt type	IRS-6S	
P-150		A traveler belt of vacuum cleaning machine for textile industries.		
Applications				
Item		Description		Remarks
Specification	Construction			①NBR (Textured Pattern, Green) ②PA Fabric ③PA Film ④NBR (Textured Pattern, Black)
	Dimensions	Antistatic	Yes	
	Width	6 to 325 [mm]		
	Length	500 to 105,000 [mm]		
	Thickness	1.35 [mm]		
	Joint	Skived joint Adhesive Polybond A		
Properties	Tensile strength	230 [N/mm]		Test speed: 50mm/min
	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	2 [%]		
	Tension at 2 [%]	11.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	60 [mm]		
	Operating temp.	-20 to +80°C		
	Coefficient of friction	0.5 to 0.6(Steel) (Green side) 0.3 to 0.4(Steel) (Black side)		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.4 [kg/m ²]		
Features				

Industrial Products Div.