



Technical Datasheet	<b>PolyBelt™</b>	Power Transmission and Conveyor Belt
	Belt type	<b>SGLA-350S</b> PN-018 Ver.0

### Applications

### Construction

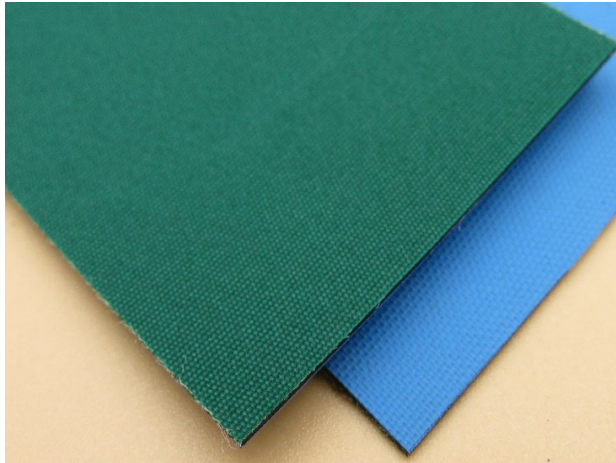

Top side	Bottom side
Polyamide	NBR
-	-
NBR-impreg. fabric	Rough pattern
Green	Blue
Tension member	Splice
Polyamide	Skiver
Film	
0.35mm	
Construction	

### Dimensions

Width/Roll (max.)	320mm
Width/Endless (max.)	320mm
Length (max.)	200m
Total thickness	1.2mm
Weight	1.2 Kg/m <sup>2</sup>

Please contact Nitta if you need other dimensions.

### Regulatory compliance

RoHS(2011/65/EC,  
(EU)2015/863)

### Features

Antistatic

### Properties

#### Minimum pulley diameter

Power Transmission Application  
Skiver 30mm

Conveyor Application  
Skiver 30mm

#### Dynamic properties

Standard elongation  
1.0%

Tension after relaxation at 1.0%  
3.4N/mm

Initial tension at 3.0%  
20.4N/mm

Tension after relaxation at 3.0%  
10.2N/mm

Operating temperature range  
-20~80°C

Operating temperature range\*  
-20~80°C

\*When under continuous use

#### Tensile properties

Tensile strength  
135N/mm

Elongation at break  
20%

Maximum allowable tension  
20.4N/mm

Maximum allowable elongation  
3.0%

#### Coefficient of friction

Top vs. Steel  
0.3~0.4

vs. Paper  
0.4~0.5

Bottom vs. Steel  
0.5~0.6

vs. Paper  
0.6~0.7

vs. Lagged pulley  
0.7~0.9

vs. POM (resin)  
0.5~0.7