
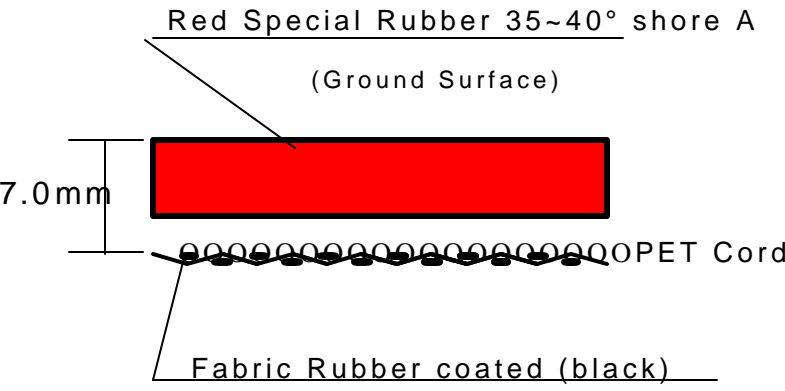


Technical Data	<b>SE-A-RN</b>	Nitta Corporation of America Feb.5.1999 
----------------	----------------	---

ITEM		DESCRIPTION
<b>Belt Specs</b>	Structure	<div style="text-align: center;">  <p>Red Special Rubber 35~40° shore A (Ground Surface)</p> <p>7.0mm</p> <p>PET Cord</p> <p>Fabric Rubber coated (black)</p> </div>
<b>Mfg. Standard</b>	Size	Width : 7.5 ±0.5 {mm} Length : 411 ± <sup>0</sup> <sub>0.7</sub> {m} Thickness : See the above structure
<b>Belt Properties</b>	Tensile Strength	60 (N/mm)
	Elongation at Break	10 (%)
	Separation Strength	N/A
	< The followings are for reference only >	
	Standard Tension	0.5 (%)
	Shaft Load at 0.5%	7.5 N/mm
	Min. Pulley Diameter	80mm
	Temperature Range	-20 to +60 (°C)
Coefficient of Friction	top: Approx. 1.5	