
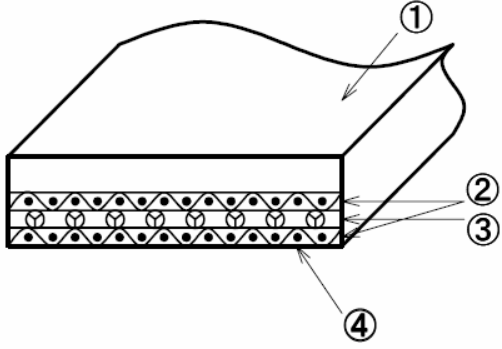


Technical Data Sheet		Belt type	SE-A-WN	Nitta Corporation of America 24-Feb-09	
Main uses	Feeder belts Sack machines				
No.	Item	Description		Remarks	
1	Specification	Construction		<ul style="list-style-type: none"> 1) white natural rubber 35A (Ground surface) 2) Polyamide fabric 3) Polyester cord 4) white chloroprene rubber (glossy surface) 	
2	Dimensions	Antistatic	No		
		Width	7 to 400 mm		
		Length	400 to 1970 mm	By molds	
		Thickness	8 mm	Thickness available 2 to 12	
		Joint	Seamless		
3	Properties	Tensile strength	58.8 N/mm width	Test speed: 10%/min	
		Elongation at break	10 %	Ambient condition: 23°C @ 50%	
		Standard elongation	0.5 %		
		Shaft load	7.35N/mm width	At 0.5% elongation 23°C @ 50%	
		Minimum Pulley Dia.	80 mm		
		Temperature range	-20 to +60 °C		
		Coefficient of friction	Ground surface approx. 2.0 Impregnated surface 0.1 to 0.3	Ambient condition 23°C @ 50% Against stainless steel or aluminum	
		Mass	10.2 kg/m ²		
4	Features	High friction Soft surface			